


**SPECIFICATIONS**

1. Manufactured using UL listed components.
2. Power requirement 120 VAC for DC supply.
3. 24 VDC for float switches and enunciator.
4. Operating temperature for panel 32-140 °F.
5. Float switch to be mounted per installation instructions.
6. NEMA 4X fiberglass, corrosion-resistant, weatherproof enclosure suitable for outdoor use and damp environments.
7. NEMA 4X alarm buzzer, 95dB @ 2' (0.6 meters).
8. Unit comes supplied with extra dry contact for connection to a building alarm system.
9. 10' of 22 gauge cable included.

**ENGINEER SPECIFICATION GUIDE**

Multi-level audio/visual alarm shall be as manufactured by Striem. Alarm panel to be UL listed components contained inside a NEMA 4X Enclosure. Alarm panel to be wired to a type 304 stainless steel explosion proof multi-level switch for multiple level monitoring.

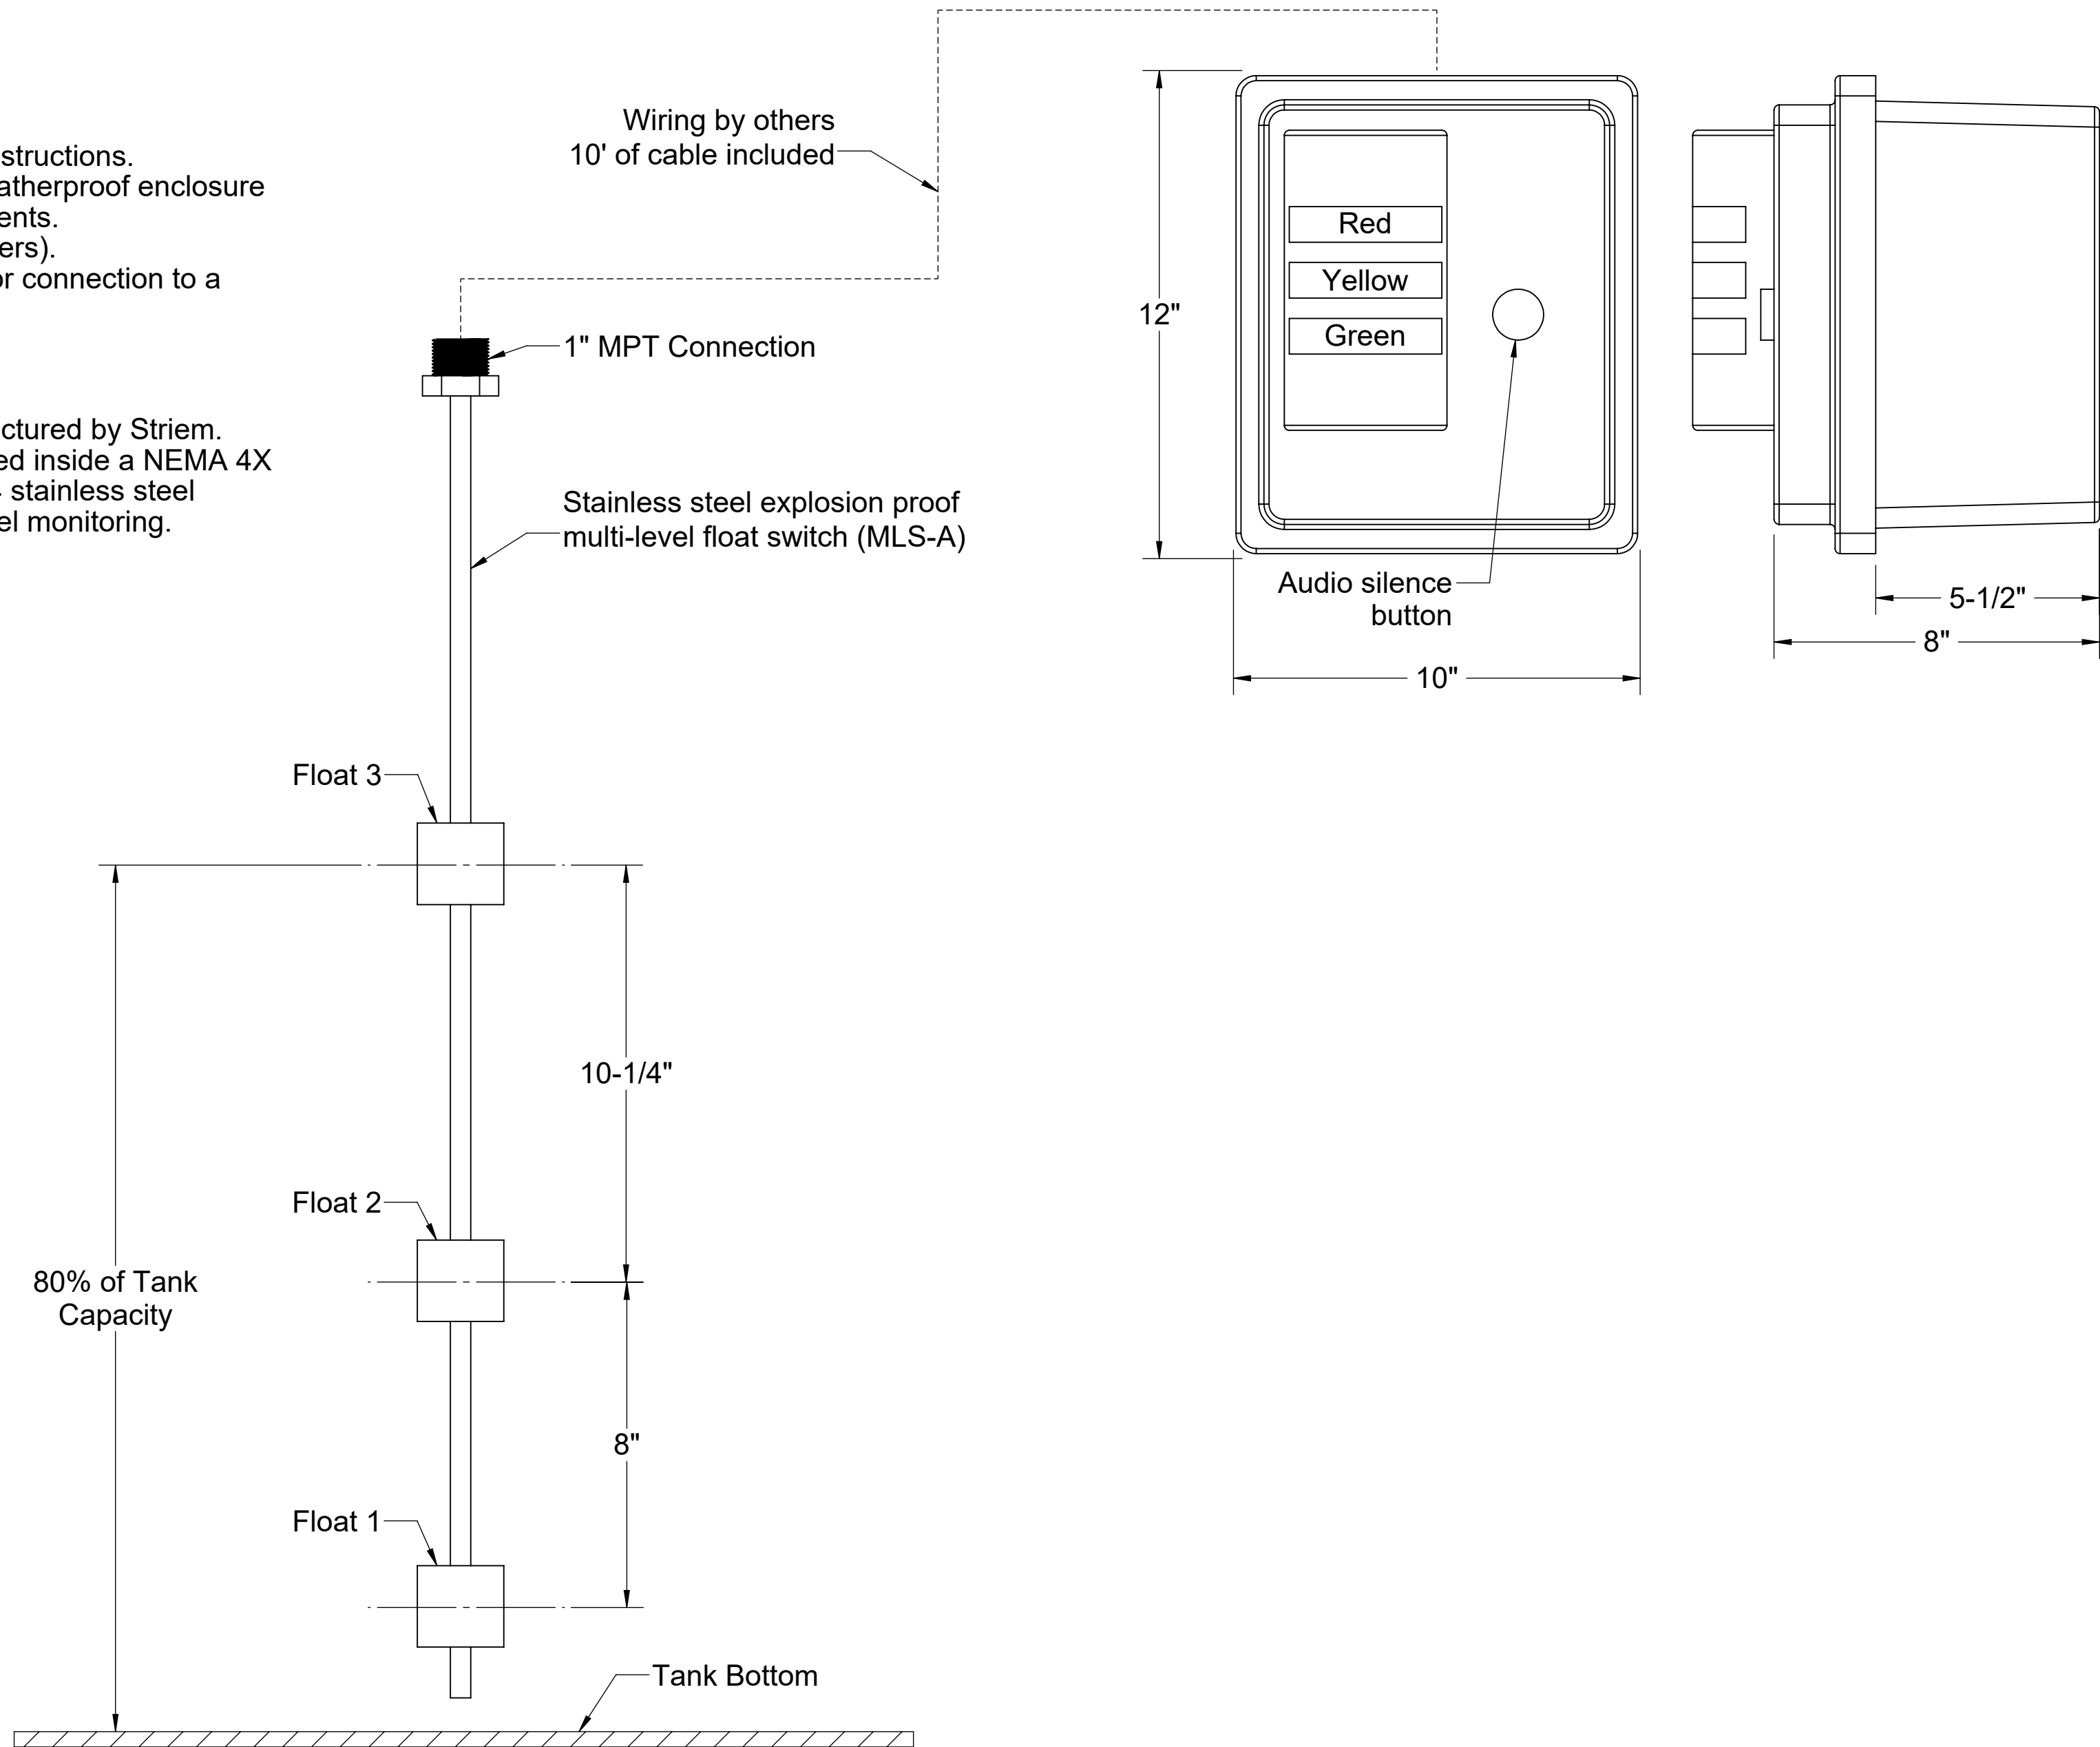

PO IS NON-CANCELABLE  
ORDER IS NON-RETURNABLE

<b>MODEL NUMBER:</b> AVA-4		<b>SPECIFICATION SHEET</b>	
<b>DESCRIPTION:</b> MULTI-LEVEL MONITOR REMOTE AUDIO VISUAL ALARM			
<b>DWG BY:</b> ENG		Striem Kansas City, KS Tel: 913-222-1500 orders@striemco.com www.striemco.com	
		Made in the U.S.A	
<b>DATE:</b> 4/24/2026	<b>REV:</b> 1		
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.			