

SPECIFICATIONS

- 1. 4" Plain End inlet/outlet, C24-M cover standard.
- 2. Unit weight: 51 lbs.
- 3. Maximum operating temperature 140 °F continuous.

NOTES

- 1. For above- or below-grade installation of the CC-1 Command Center pH probe.
- 2. For gravity drainage applications only.
- 3. Do not use for pressure applications.
- 4. Cover shall provide water/gas-tight seal and have a maximum 2,000 lbs. load capacity.
- 5. Handle may be extended using 1-1/2" PVC pipe by others.
- 6. pH probe with 10' of wire & control panel with 50' of wire included with CC-1.
- 7. Maximum burial depth: 103" from standard cover height.

OPTIONS

Connection Options (Plain End Only)

Inlet / Outlet
☐ 6"

Riser Options

From Factory: Up to 2"



- ☐ Up to 21": SR24
- ☐ Up to 36": LR24
- ☐ Up to 40": SR24 (2)
- ☐ Up to 55": SR24 + LR24
- ☐ Up to 69": LR24 (2)
- ☐ Up to 87": SR24 + LR24 (2)
- ☐ Up to 103": LR24 (3)

- OR -

- ☐ CPRK: 11" - 103" (See specification for more detail.)

Additional Options

- ☐ C24-HP: H20 Traffic-Rated Pickable Cast Iron Cover

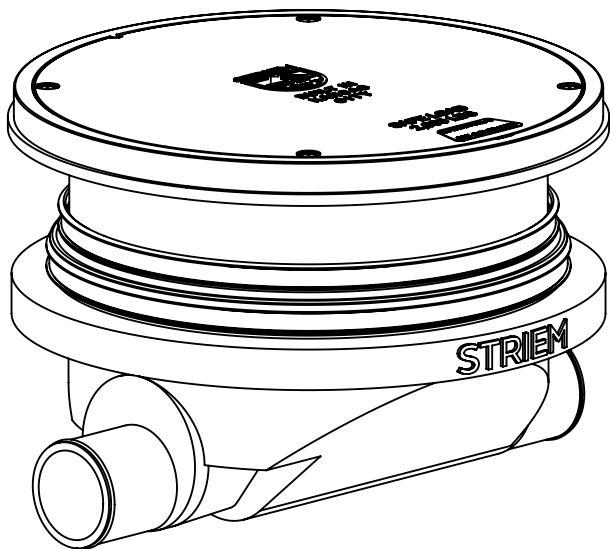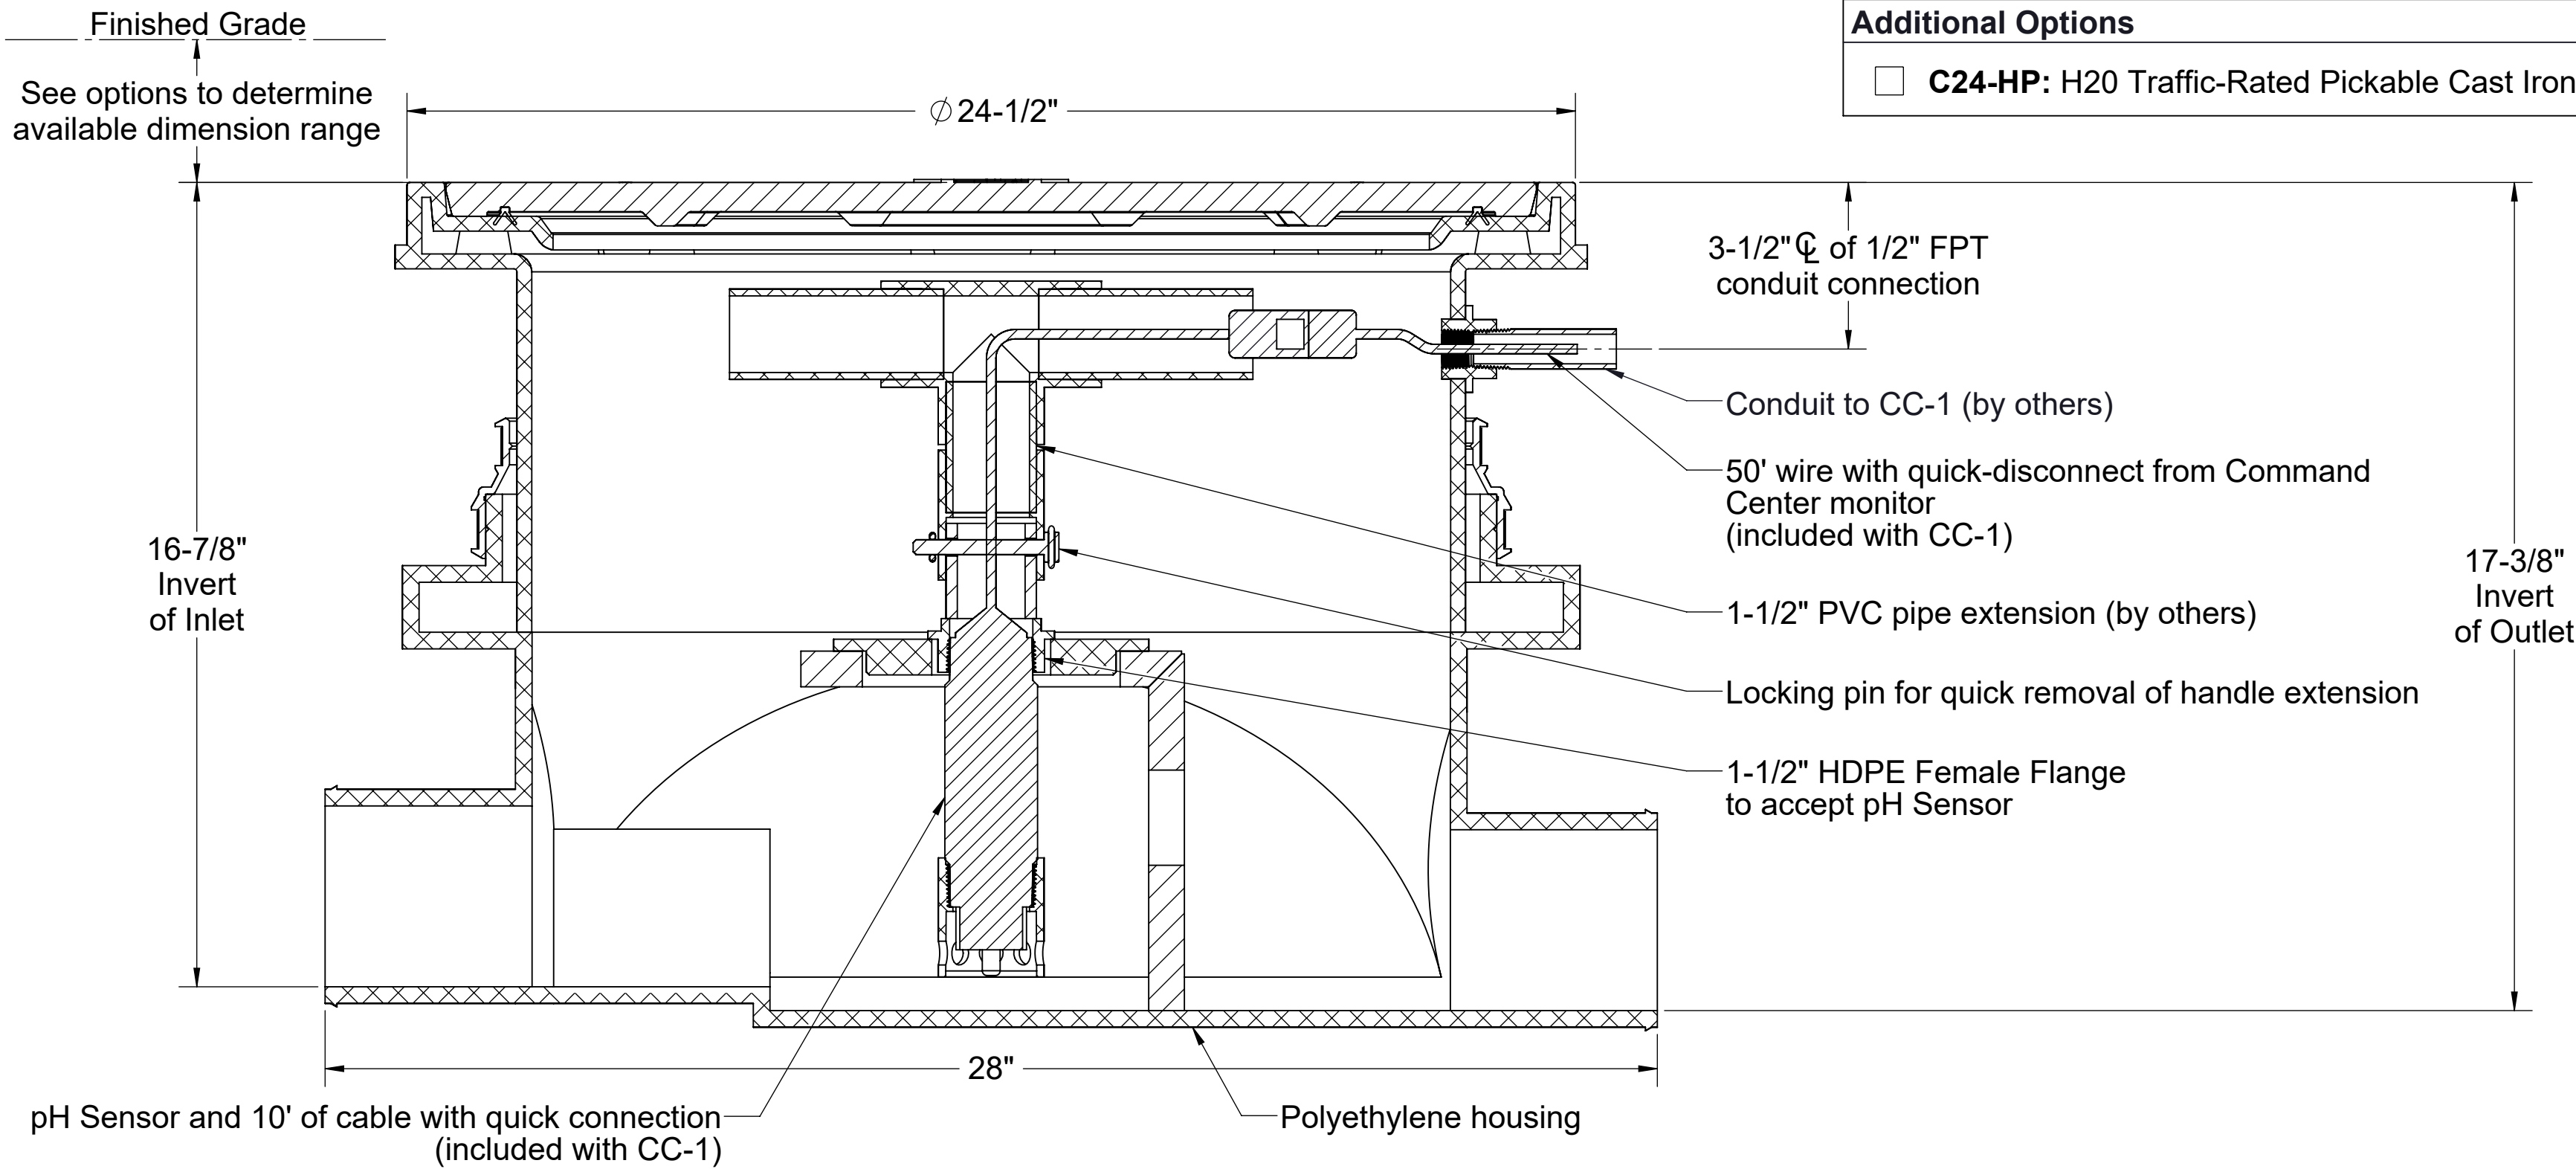

PO IS NON-CANCELABLE
ORDER IS NON-RETURNABLE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

MODEL NUMBER: SPK

DESCRIPTION:

SENSOR PLACEMENT KIT FOR
COMMAND CENTER™ pH MONITORING SYSTEM

DWG BY: ENG

DATE: 9/15/2026

REV: 1

SPECIFICATION SHEET

Striem
Kansas City, KS
Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

