SPECIFICATIONS

- 1. 1-1/2" or 2" PVC socket inlet and outlet connections (adapters included).
- 2. Under-sink solids interceptor.
- 3. PVC housing, polycarbonate perforated basket with o-ring to provide water-tight seal.
- 4. Top inlet and three outlet options (plugs included for unused outlets).
- 5. Tamper proof bracket (hardware included). 1/8" Allen key needed for maintenance (by others).
- 6. Max flow rate: 23 GPM.
- 7. Solids capacity: 0.17 gallons.
- 8. Unit weight: 3.2 lbs.
- 9. Maximum operating temperature: 140°F continuous.
- 10. For gravity drainage applications only.


ENGINEER SPECIFICATION GUIDE

Striem solids interceptor model SIDEKICK shall be lifetime guaranteed and made in the USA. Interceptor shall be constructed of an injection molded PVC housing and polycarbonate perforated basket. Interceptor is manufactured for above-grade installation. Basket shall provide the ability for side-access maintenance and shall be clear to allow visibility into unit. Solids capacity shall be 0.17 gallons. Interceptor shall be certified to IAPMO IGC 167-2011ae2 and carry a UPC listing.


APPLICATIONS FOR USE*

- · Pet wash sink (hair)
- · Art room sink (clay/plaster)
- Kitchen sink (food waste)
- · Utility sink (paint chips/debris)
- · Washing machine (lint/debris)
- · Barber shop/hair salon sink (hair)
- · Dentist sink (dental plaster)


INCLUDED




2" x 1-1/2" NPS PVC Adapter



2" x 1-1/2" PVC Adapter (2)



2" Inverted PVC Plug (2)

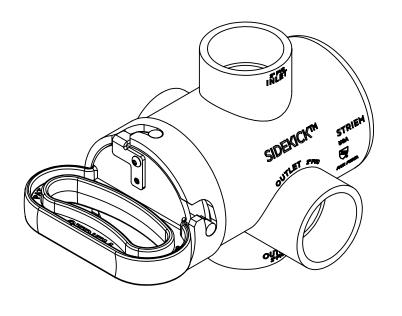



PROPRIETARY AND CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.


ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS PROHIBITED.

DWG BY: ENG

DATE:

5/18/2023

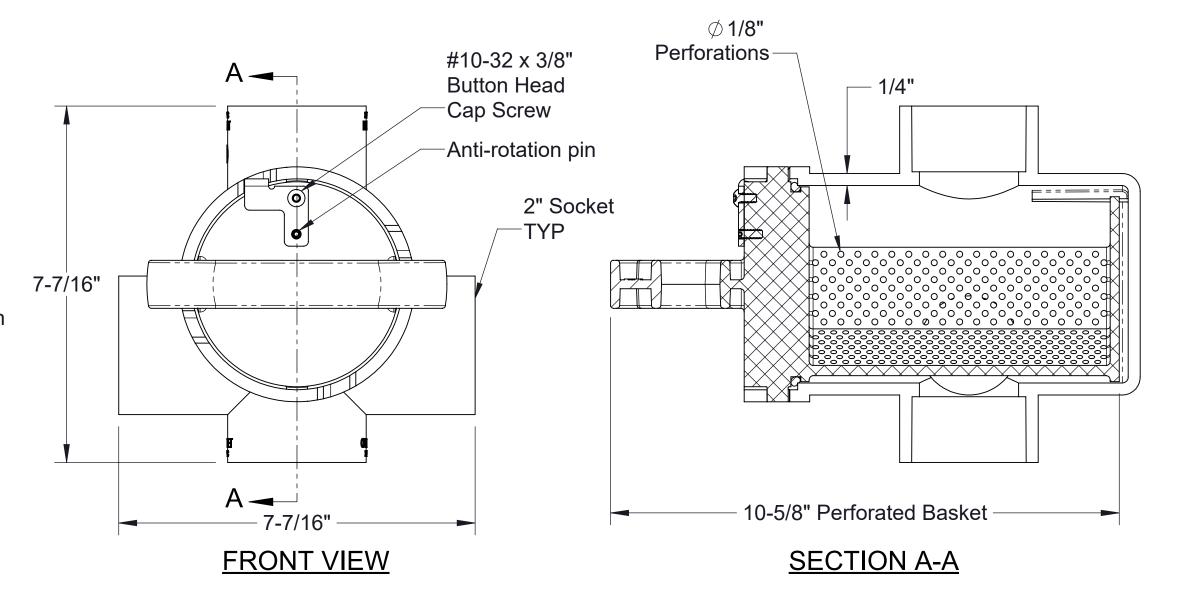

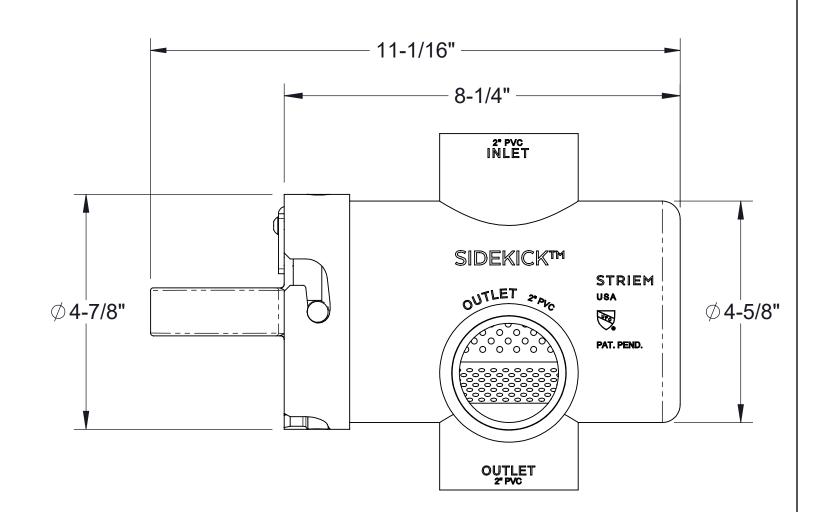

SIDE VIEW

MODEL NUMBER: SIDEKICK-TP

DESCRIPTION:

SIDEKICK™

SIDE ACCESS SOLIDS INTERCEPTOR

WITH TAMPER PROOF BRACKET

STRIE

Kansas City, KS

Tel: 913-222-1500
orders@striemco.com
www.striemco.com

Made in the U.S.A

REV:

^{*}List is not exhaustive.