

**SPECIFICATIONS**


- 6" Plain End inlet shown, 3" Plain End vents, H2O traffic-rated cast iron covers standard.
- Liquid holding capacity: 2000 gallons (267 cu. ft.).
- Unit weight w/ standard covers: 2000 lbs.
- Maximum operating temperature 140°F continuous.

**NOTES**

- For gravity drainage applications only.
- Do not use for pressure applications.
- Capped auxiliary vent provided to allow flexibility with vent piping and design. Provided cap can be moved to unused vent location, or discarded if two chamber vents are required per local code.
- Cover placement allows full access to tank for proper maintenance.
- Lifting lug set for easy install.
- Maximum burial depth: 106" from standard cover height.


**ENGINEER SPECIFICATION GUIDE**

Striem decontamination tank model BB-2000 shall be lifetime guaranteed and made in the USA. Tank shall be constructed of polyethylene with 7/8" nominal wall thickness. Tank shall be manufactured for below-grade installation. Field-adjustable riser system is available as an option to bring manhole covers to grade. Tank liquid holding capacity shall be 2000 gallons. Covers shall be H2O traffic-rated pickable cast iron.

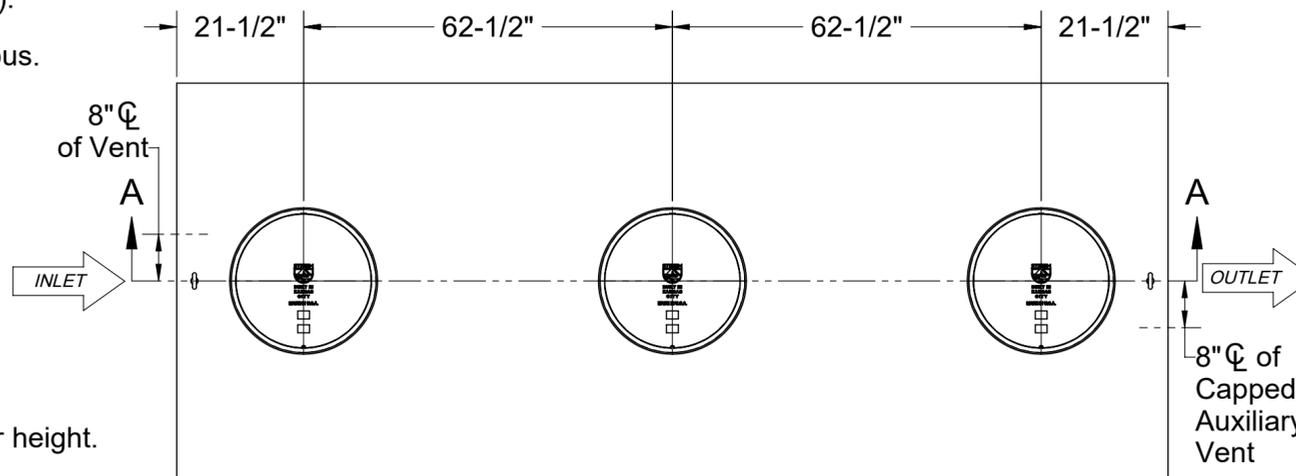


**TOP VIEW**


OPTIONS	
<b>Connection Options (Plain End Only)</b>	
<b>Inlet</b>	<b>Optional Outlet</b>
<input type="checkbox"/> 3"	<input type="checkbox"/> 3"
<input type="checkbox"/> 4"	<input type="checkbox"/> 4"
<input type="checkbox"/> 6"	<input type="checkbox"/> 6"
<b>SELECTION REQUIRED</b>	
<b>Riser Options</b>	
<b>From Factory: 0" - 5"</b>	
<input type="checkbox"/> Up to 24": <b>SR24</b> (3)	
<input type="checkbox"/> Up to 39": <b>LR24</b> (3)	
<input type="checkbox"/> Up to 43": <b>SR24</b> (6)	
<input type="checkbox"/> Up to 58": <b>SR24</b> (3) + <b>LR24</b> (3)	
<input type="checkbox"/> Up to 72": <b>LR24</b> (6)	
<input type="checkbox"/> Up to 90": <b>SR24</b> (3) + <b>LR24</b> (6)	
<input type="checkbox"/> Up to 106": <b>LR24</b> (9)	
<b>- OR -</b>	
<input type="checkbox"/> <b>CPRK</b> (3): 11" - 106" (See specification for more detail.)	
<b>Additional Options</b>	
<input type="checkbox"/> <b>C24-M</b> (3): 2,000 lbs. Rated Bolted Composite Covers	
<input type="checkbox"/> <b>HDK-7</b> : High Water Table Hold Down Kit	
<input type="checkbox"/> <b>AVA-3</b> : Single-Level Monitoring Package *	
<input type="checkbox"/> <b>AVA-4</b> : Multi-Level Monitoring Package *	
*Monitoring packages will raise covers by 3"	

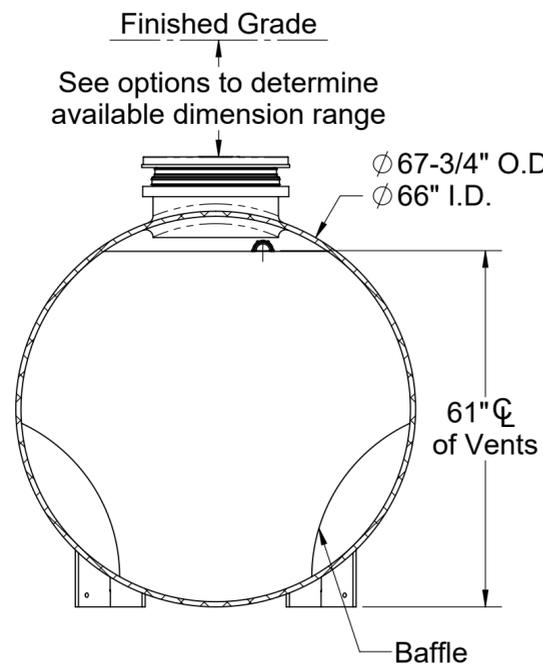

**SECTION B-B**

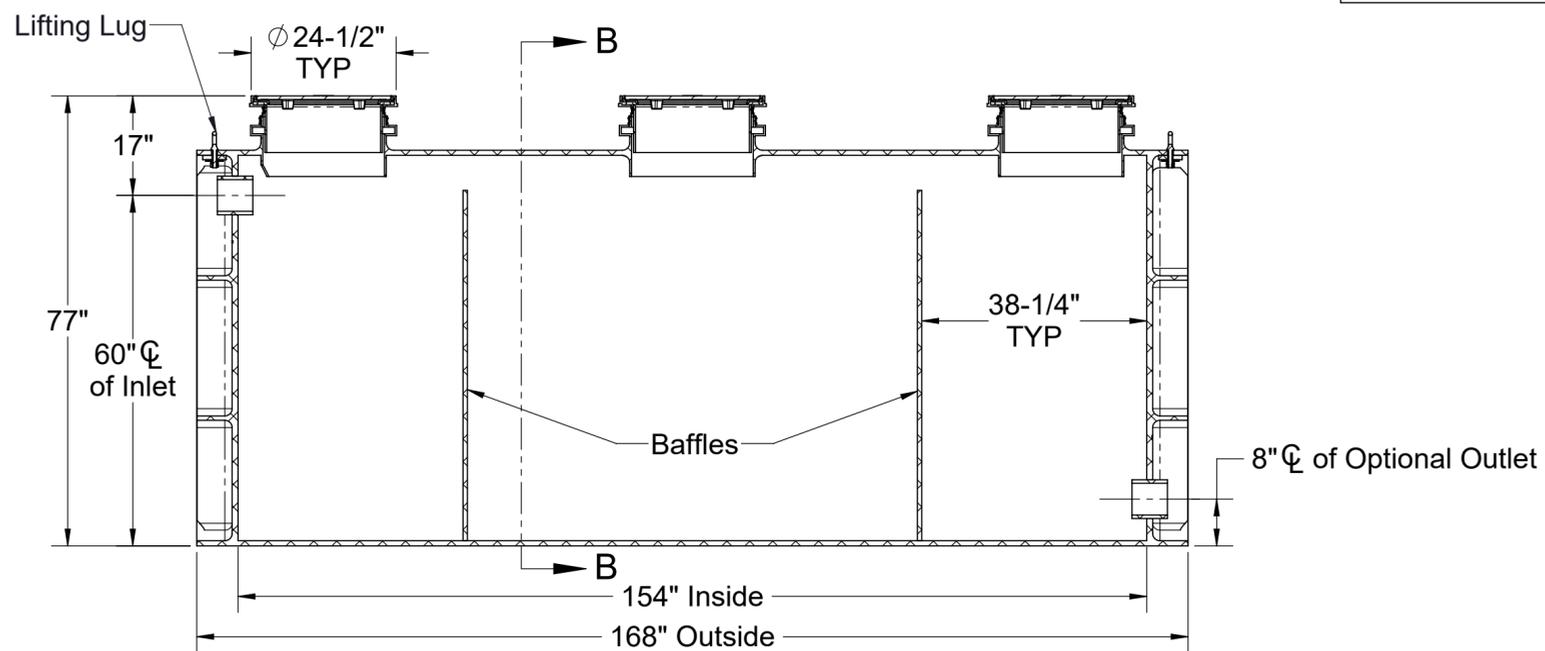

**SECTION A-A**

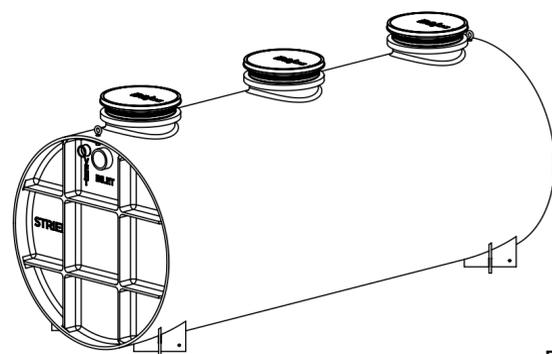

**PO IS NON-CANCELABLE ORDER IS NON-RETURNABLE**

<b>MODEL NUMBER:</b>	BB-2000
<b>DESCRIPTION:</b>	BIO BASIN™ POLYETHYLENE DECONTAMINATION TANK 2000 GALLON CAPACITY
<b>DWG BY:</b>	ENG
<b>DATE:</b>	2/23/2026
<b>REV:</b>	2

**SPECIFICATION SHEET**

Striem  
Kansas City, KS  
Tel: 913-222-1500  
orders@striemco.com  
www.striemco.com

Made in the U.S.A

